



**MANUFACTURERS
OF COFFEE GRINDERS**

Professional coffee grinder
for all types of coffee.

MARFIL ABS COLLECTION CLASSIC

TECHNICAL

0-500gr/5' Max 3Kg

Voltage: 230V / 220V / 110V

Frequency: 50Hz / 60Hz

Phases: 1(monophase)

RPM: 1.300 / 1.600

Current: 1,75A / 3,7A

Capacitor: 10nf / 40nf

Power: 0,20Hp / 356W

Protection rating: IP21

Motor supplied with thermal protector

Maximum operating time: 30 min.

Tempered steel grinding wheel (62HRC) ø 60mm

Lifespan of grinding wheels: 500kg

Hopper capacity: 2kg

Doser capacity: 600 g

Doser regulation: 5/12 g

Doser lever: right/left

Stop/start standard version: manual

Optional: automatic start

Dimensions width x length x height: 210x380x600mm


Weight: 9kg

Air noise: 77dB

Diseñado bajo directiva 89/392 CE



Grinding blades in tempered steel
(62HRC) ø 60mm.

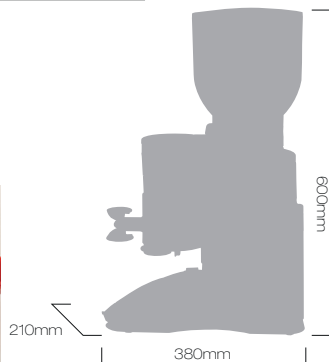

GREY

DARK GREY

BLACK

PURPLE



MAIN ATTRIBUTES

Hopper (2kg) made of unbreakable and non-deformable material (co.polyester), with fast lock system and self-levelling when off the coffee grinder, with the possibility of cleaning in a dishwasher at 90 °C. Micrometric regulation of the coffee grind using a regulatory pawl. New expulsion system for the ground coffee (always leaving the grinding cavity clean when the coffee grinder stops). Bodywork manufactured in anti-scratch material, in a single piece (less vibrations, more robustness). With ventilation system (internal air inlet and outlet). Large tray integrated into the body, ready to take knocks (portafilter). Single-bodied, hermetically sealed doser without aroma loss, vibrationless and made of unbreakable material. Ergonomic handle. Universal coffee tamper (rotatable). Doser fitted with gasket-saver (portafilter positioner). Hardened steel grinding blades (62/65HRC) 60mm in diameter.

Optional: Left- or right-handed doser lever. Coffee counter. Optional personalisation system with chrome plates on the doser and on the rear of the bodywork. Automatic stop/start every two cups (depending on filling dispenser). "High Production" motor 0,33Hp/402W.

LIQUIDLINE®